


2020 INVITATION TO BID (ITB)
Construction and Rehabilitation of the Wimauma Opportunity Center

Addendum 1: Outdoor Signage Specs

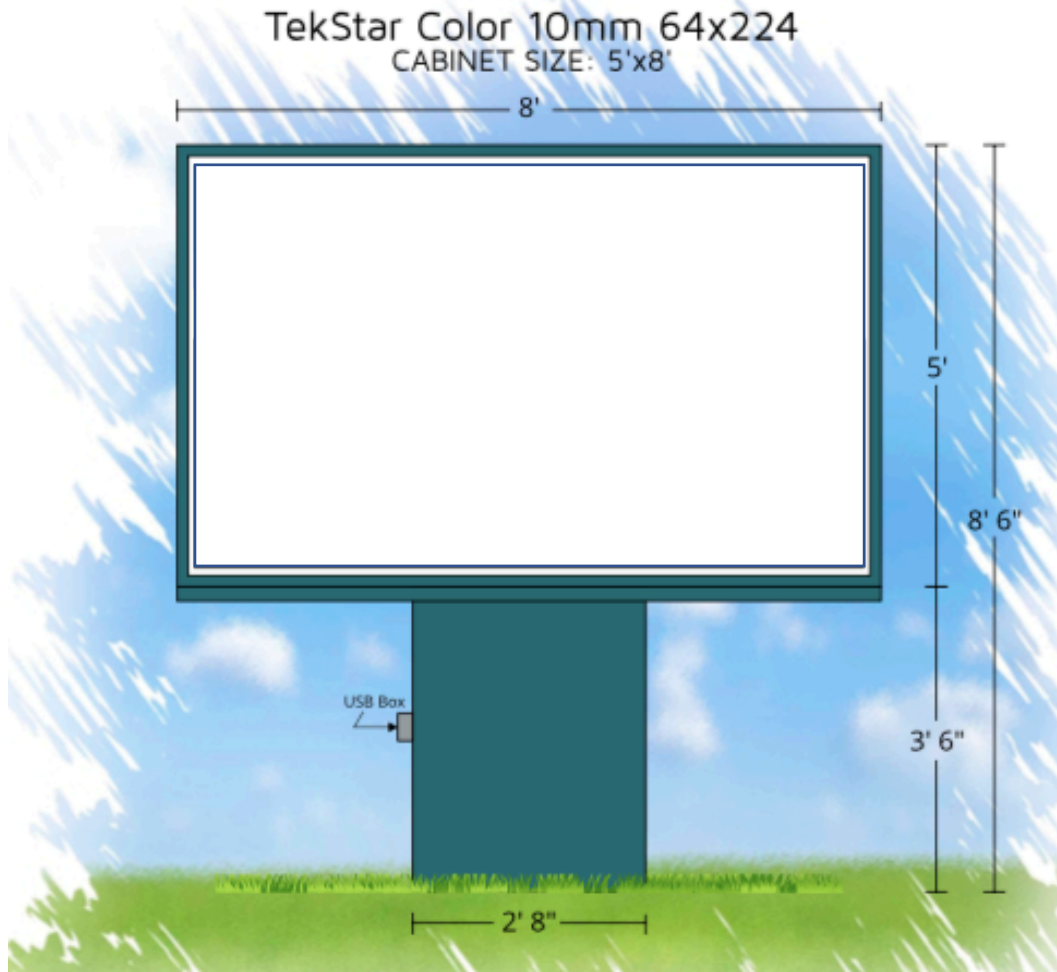

DESCRIPTION	
5' x 8' Double Sided 10mm TekStar, 64x 224 Full Color LED Display with 12" Deep, Hinged Extruded Aluminum Cabinet and Thermoformed Makrolon SL Faces Decorated on Inside Surface with 3M Vinyl Graphics	
Face / Cabinet Details	
TekStar Inner LED Cabinet, 10mm Full Color 64x224 Matrix	Header Area Decorated with Internal Photo-Real Graphics
Electrical Information	
Horizontal LED Illumination Package for a 3' x 8' Cabinet LED Communication Method: Short-range Wireless; connectivity requires line-of-sight between sign antenna and wireless device antenna mounted on building by customer. Maximum distance of 1,500 feet* between antennas.	One 20 Amp Circuit, 240 Volts; Max Draw: 10.4 Amps SignCommand.com Cloud-Based Software Included FREE
Structural Details	
Mount Style: Dual Leg Mount Mount Size: Leg Width: 2 Ft 8 In Minimum Wind Load Rating: 120mph, Exposure B	Cowling (Creates Pedestal Appearance) Leg Height: 3 Ft 6 In Overall Sign Height: 8 Ft 6 In